





Line 6				
Mic Specs	HS70	HS30	LM4 (both)	HH element
element	back electret cond	back electret cond	back electret cond	dynamic
polar	omni	cardioid	uni-directional	cardioid
freq response	20Hz-20kHz	50Hz-15kHz	50Hz-16kHz	*model dependant
sensitivity (dB)	-46	-45	-46	-57
output Z	2k ohm (+/-30%)	1.8k ohm	680 ohm	250 ohms
power supply	1.5-12 VDC	1.5-12 VDC	1.5-10VDC	n/a
cable length	50" (1.2m)1.2M	50" (1.2m)	39" (1m)	n/a
temp range	.	.	.	60 to -25 C temp


HS70

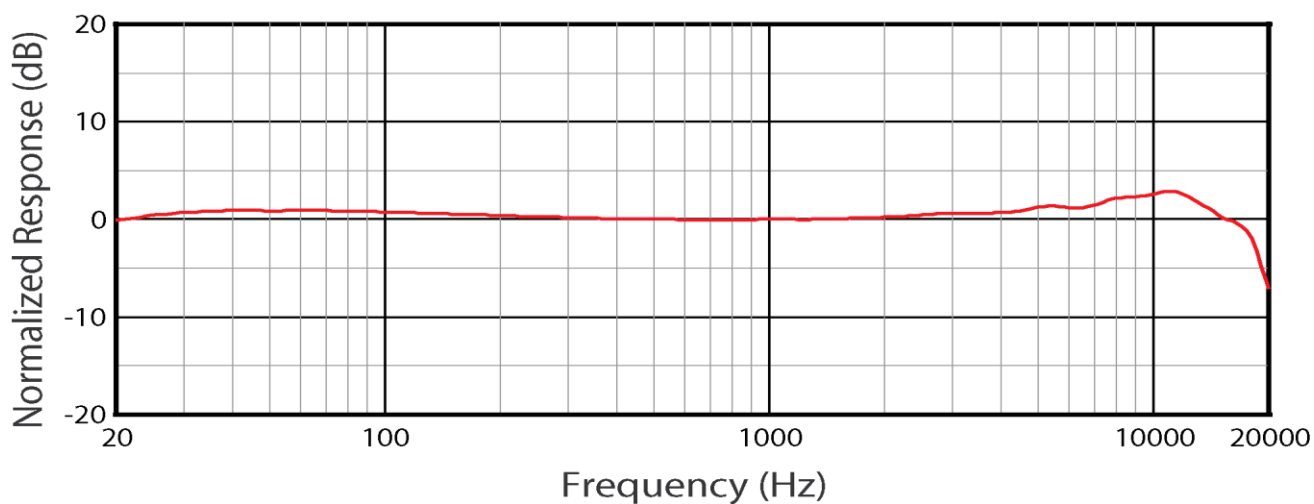

HS30

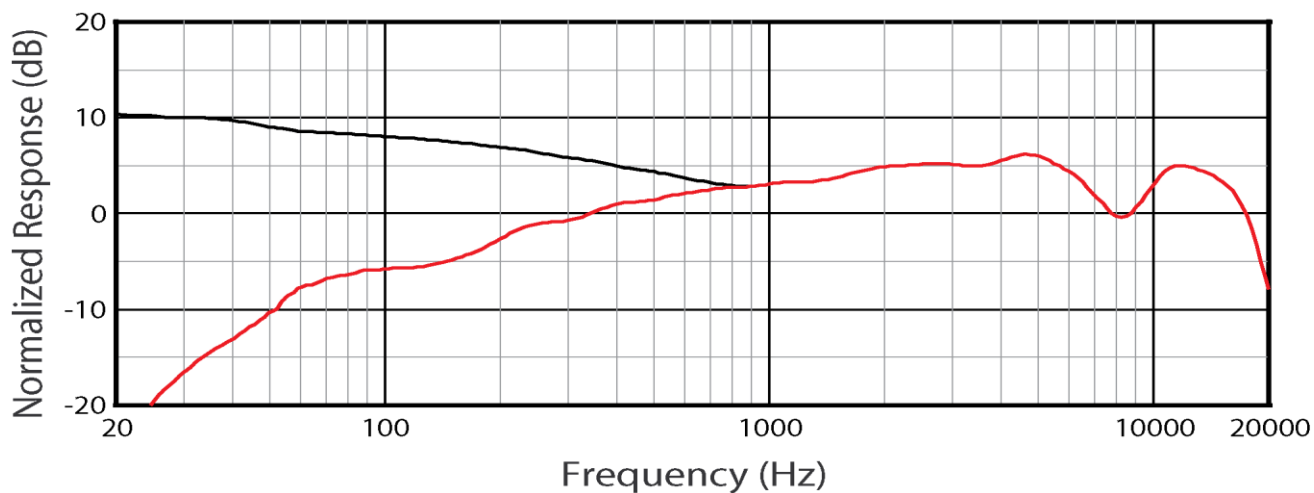

LM4-*

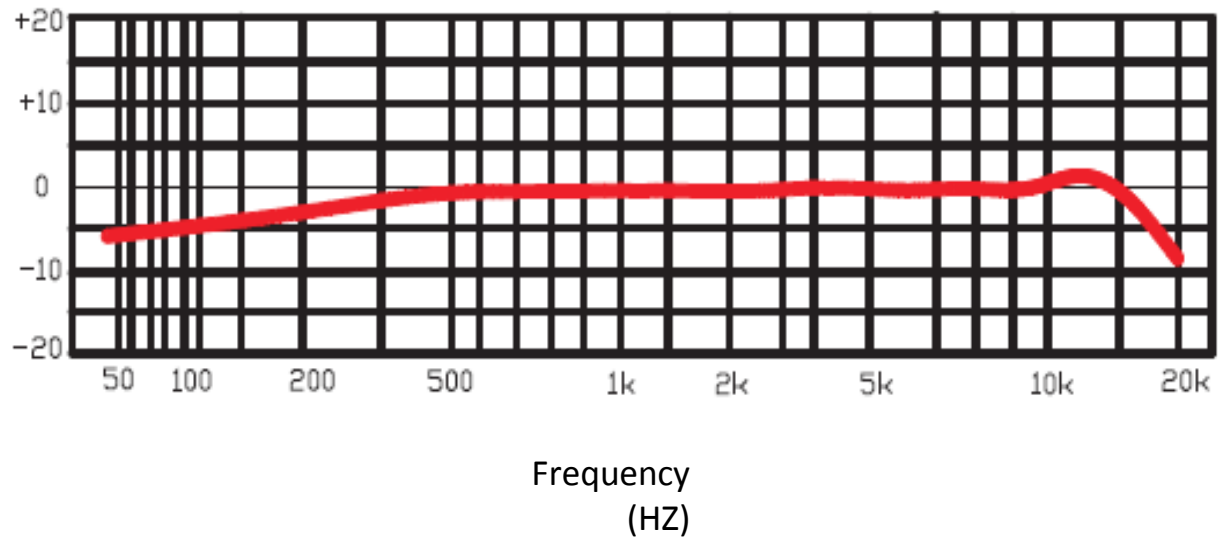

for Handheld Transmitters please see "Line 6 Guide to Mic Models"